MIDMARK®

Installation/Operation Instructions

9A0100X & 9A20600X Knee Crutch Assemblies

KIT COMPONENTS

Part Number	Description	Qty.
9A0100X	Knee Crutch Assembly	1
or		
9A20600X	Knee Crutch Assembly	1
003-0731-00	Installation / Operation Instructions	1

REQUIRED TOOLS

Phillips screwdriver
7/16" Open end wrench or socket and ratchet.
Power hand drill
7/32" and 9/32" Drill bits

IMPORTANT INFORMATION

To support the knee and legs for pelvic examinations.

INSTALLATION (1)

MA452400

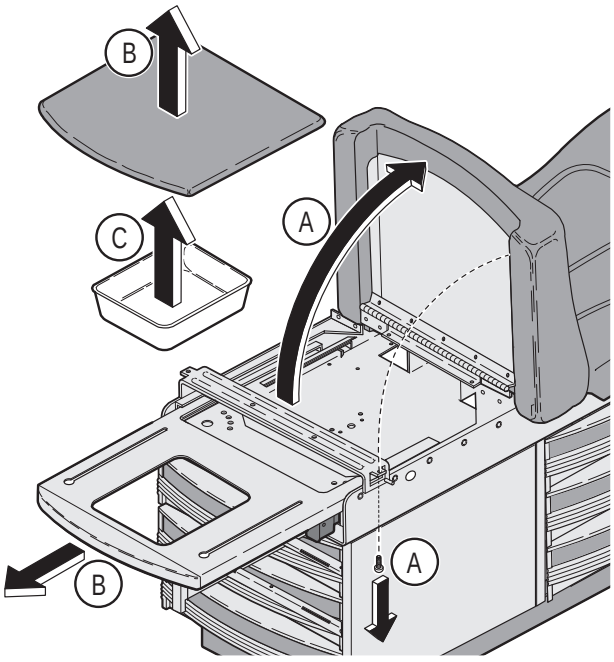

NOTE

For tables without pelvic tilt, remove two screws that secure seat to upper wrap.

- **A.** With table in horizontal position, lift seat vertically. Secure it to prevent it from falling.
- **B.** Extend footrest shelf and remove pad.
- **C.** Remove drain pan.

INSTALLATION (2)

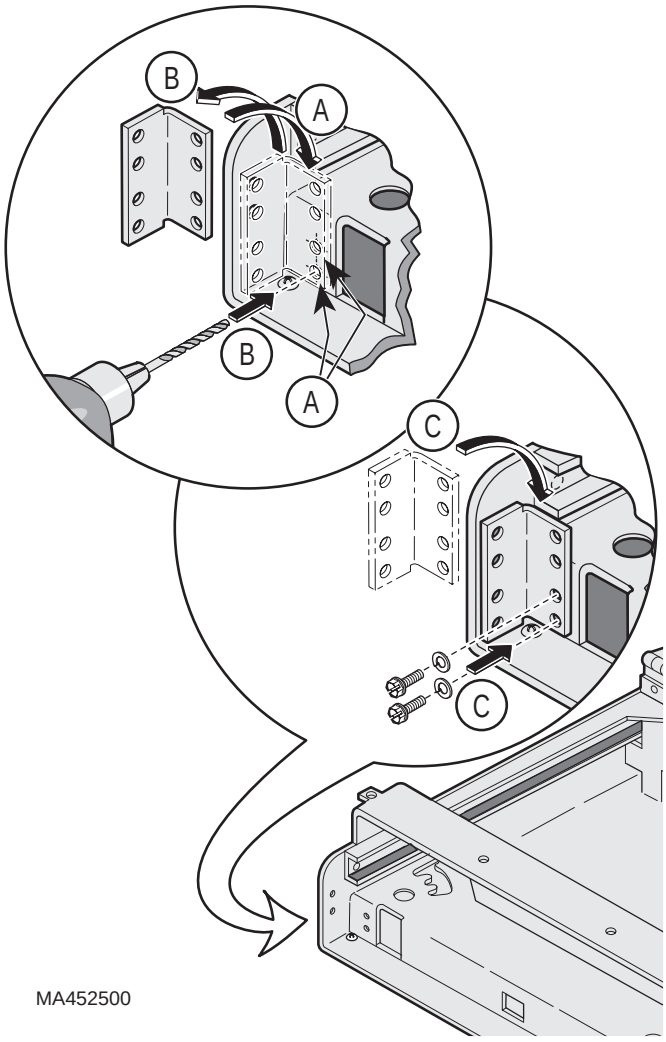

MA452500

EQUIPMENT ALERT

Two sets of knee crutch mounting brackets are supplied with kit. Only use set of brackets that fit in corners of upper wrap without protruding past outer edges. Discard other set of brackets.

NOTE

Position mounting bracket with notched end against stirrup channel, holding bracket tight to corner.

- **A.** Mark hole location on stirrup channel using two ***lower*** holes.
- **B.** Using 7/32" drill bit, drill two holes in stirrup channel at location marks.
- **C.** Install mounting bracket with two lockwashers and 1/4"-20 x 5/8" screws.

© Midmark Corporation - 2002

INSTALLATION (3)

MA452600

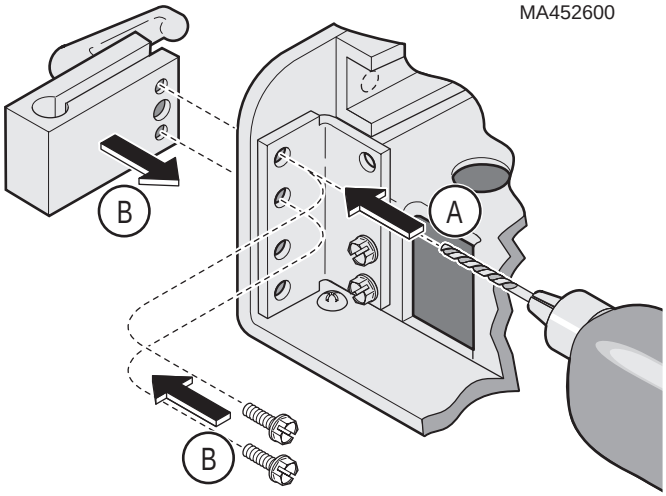

A. Use <u>two top holes</u> of mounting bracket as template and a 9/32" drill bit to drill two holes through side of upper wrap.

B. Install plate clamp with two 1/4"-20 x <u>5/8"</u> screws.

INSTALLATION (4)

MA452700

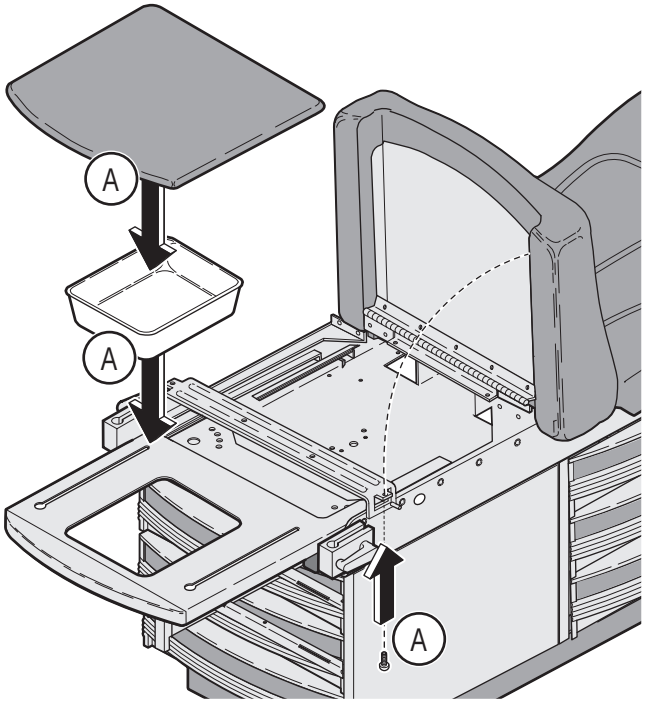

NOTE

For tables without pelvic tilt, reinstall two screws that secure seat to upper wrap.

A. Install drain pan and footrest pad.

OPERATION (9A0100X KNEE CRUTCH)

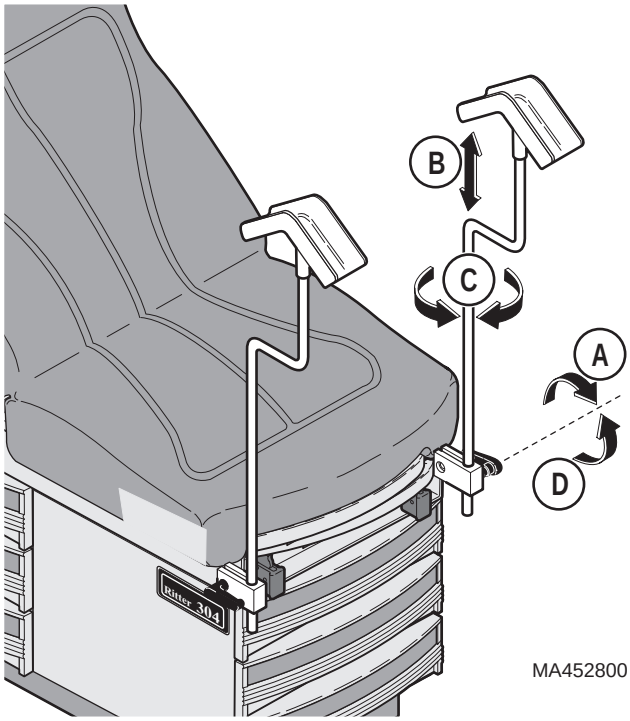

MA452800

A. Loosen handle.

B. Insert knee crutch assembly to desired height.

C. Rotate knee crutch to desired position.

D. Tighten handle.

OPERATION (9A20600X KNEE CRUTCH)

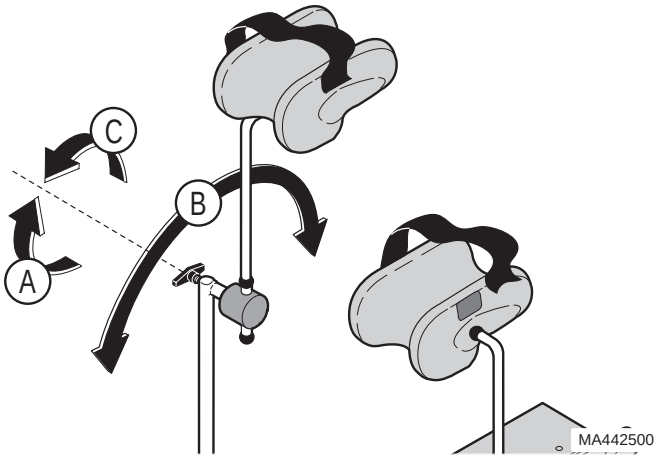

A. Loosen handle.

B. Rotate knee crutch to desired position.

C. Tighten handle.

MIDMARK®

Midmark Corporation, Versailles, Ohio 45380 U.S.A.
(937) 526-3662 FAX (937) 526-5542

003-0731-00 Rev. E (2/02)

© Midmark Corporation - 2002